




Great Photoelectric corp.

Unit:mm

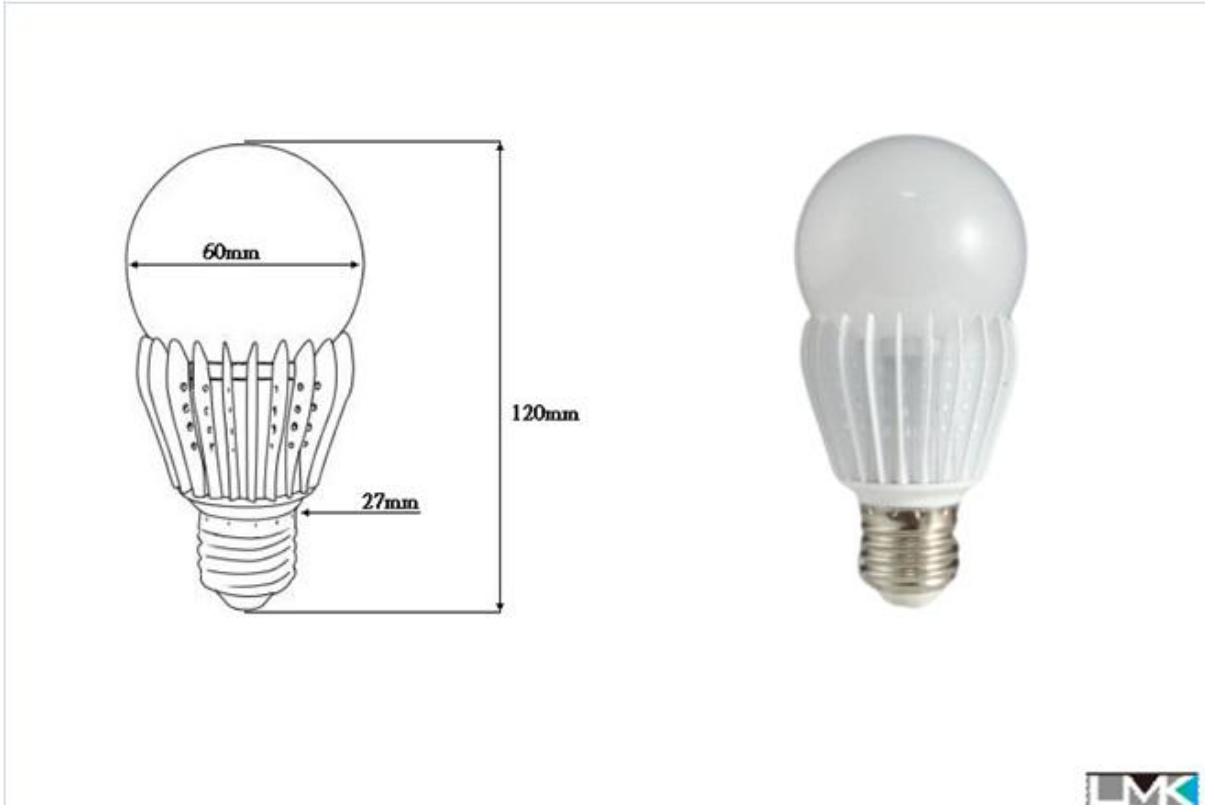

| Item | Model No. | Material | Dimensions : (mm) | | | PF | Socket | Life (H) |
|----------|-------------|-----------|---------------------|---------|---------|----------|---------|-------------|
| | | | Length | Tube ΦD | Hold-ΦD | | | |
| E27 | E71610U681R | PC / Al. | 120 | 60 | 27 | >0.95±3% | E27 | 40000 |
| Ra | LM (Lm) | Power (W) | Color Tem.(K) / CRI | | | Input AC | Lm.Eff. | Environment |
| Ra≥80±5% | 950-1000 | 10 | 6000 | | | 90-260V | 95-100 | -20~50°C |

Attention :

- 1.The products are in the AC drive.
- 2.Before installation please remove the starter ,transformer dismantling and turn off AC.
- 3.Do not touch this product to water, so as not to cause lamp damage.
- 4.This product is a PC material, avoid fall damage.

Characteristic :

- ★.Lamp beam angle of 270 degrees.
- ★.Lamp nodal temperatures below 50 degrees.
- ★.Meet UL safety certification.
- ★.Surge resistance antistatic design.
- ★.Below zero low temperature lighting.
- ★.Full range voltage input , fixed current designs, not affected by the change in voltage disturbances.
- ★.Use a professional IC design,AC driver.
- ★.In series, parallel design,one chip doesn't shine, lamp still glowing.

| | | | | |
|---------------------------|------------|-------------|-------|-----------|
| Manufacturer: | Data: | Model No. : | R&D : | Manager : |
| Great Photoelectric corp. | 10-02-2013 | E71610U681R | | |